


(1) cut the joint completely

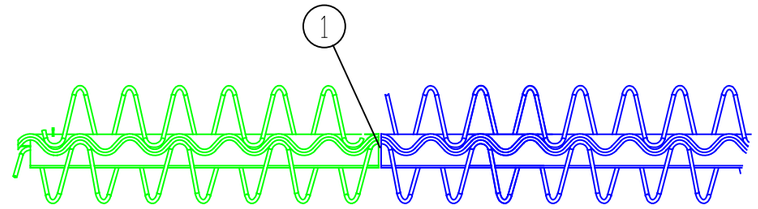


(2) cut the body of the "red" joint in 45° !!! from the back side to fit the top strip

(3) weld the 2 inner cornersand the back side of the upper strip
important: make sure not to weld through!

(4) place additional reinforcement 3 x diam. 10mm top and bottom

Attention:
It's recommended to always use the prefabricated crossing elements from HCJ.
The shown way should be used just in exeptional cases

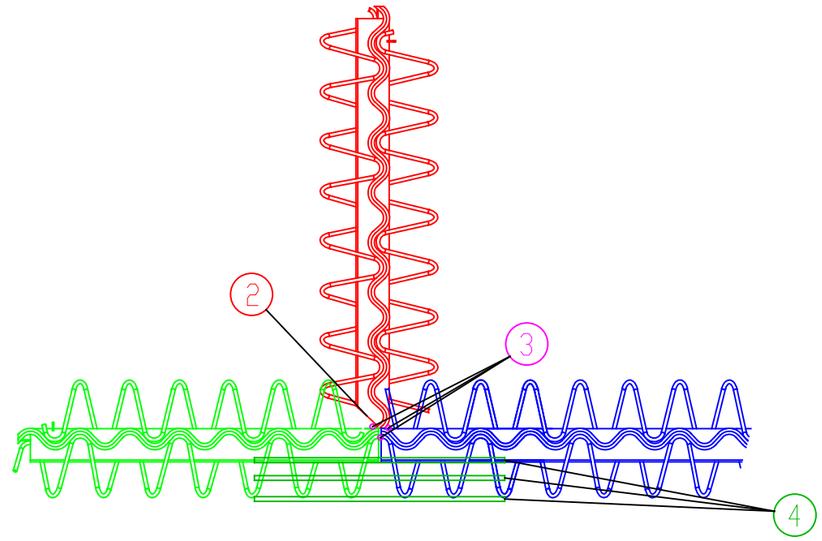Available materials:

Steel
Electrogalvanised steel
Stainless steel

Hcj reserves the right to alter the products without notice

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HCJ ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HCJ IS PROHIBITED.

HENGELHOEF CONCRETE JOINTS
Hengelhoefstraat 158
3600 Genk, Belgium
Tel. 0032 89 32 39 82
Fax. 0032 89 32 39 88
www.hcjoints.eu
e-mail info@hcjoints.be

TITLE: T-connection of e-slide joints

| SIZE | DWG. NO. | REV |
|---|---|---|
| A3 | e_slide | |

ALL DIMENSIONS ARE IN MM | DO NOT SCALE DRAWING | SCALE: 1:10 | SHEET 3 OF 7