FIXING CONNECTOR – KB

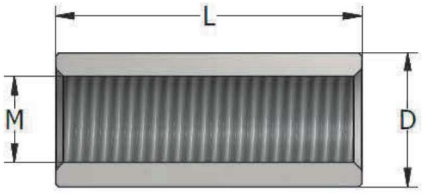

Fixing connectors KB are manufactured in steel S355JO galvanised (EV), hot-dip galvanised (TV) or in stainless steel 304 / W 1.4301 (SS2) or W 1.4571 –AISI 316Ti (SS4).

KB	Product number				Thread	Overall length L	D	Weight
	Zinc galvanising	Hot-dip galvanised	Stainless steel SS4	Stainless steel SS2	M	[mm]	[mm]	[kg/pc]
KB M12x36	45662	45679	44342	44331	12	36	17.5	0.033
KB M16x48	45668	45678	44343	44653	16	48	22	0.085
KB M16x45	45902	45905	45904	45903	16	45	22	0.079
KB M20x55	45898	45901	45900	45899	20	55	28	0.124
KB M20x60	45663	45677	44345	44655	20	60	28	0.135
KB M24x72	45664	45676	44347	44335	24	72	34	0.257
KB M30x90	45665	45675	44471	44338	30	90	42.5	0.493
KB M36x110	45666	45674	44802	45542	36	110	50	0.830
KB M42x126	44468	44470	45537	44340	42	126	56	1.166

Copyright Terwa Construction Group 2005 – 2024 © | www.terwa.com
EN – Original Instructions